


Miniaturised Asteroid Remote Geophysical Observer (M-ARGO): a stand-alone deep space CubeSat system for low- cost science and exploration missions

R. Walker, D. Koschny, C. Bramanti & ESA CDF study team

6th Interplanetary CubeSat Workshop, Cambridge, UK
30 May 2017

Past/Present ESA Deep Space CubeSat studies: Mother-daughter architectures

CubeSats on Asteroid Impact
Mission (AIM)


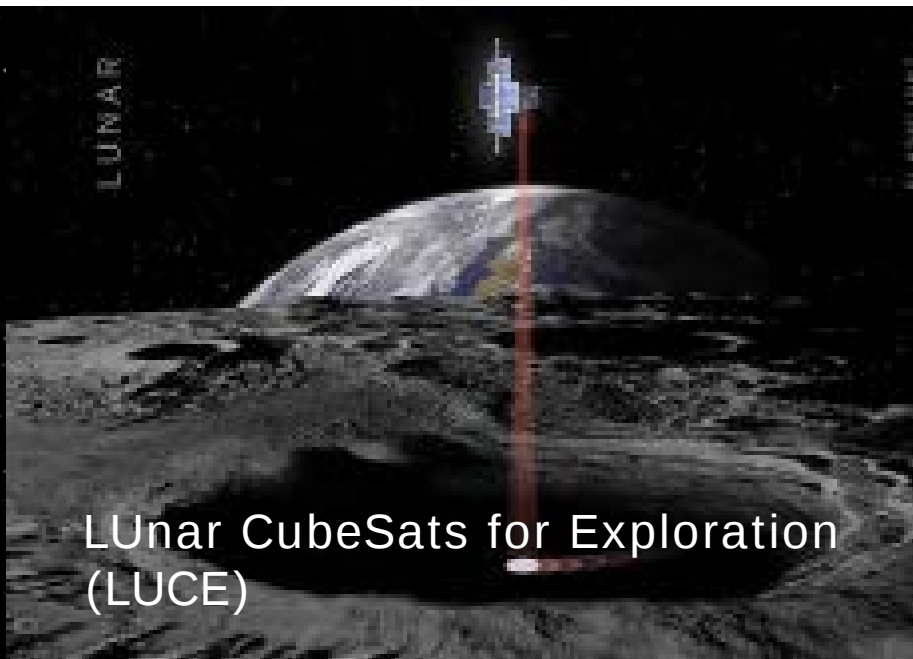


Lunar CubeSats for Exploration
(LUCE)

Transportation & data relay provided by mothercraft
CubeSat inter-satellite links, relative navigation


Stand-Alone Deep Space Cubesats

- High potential to cut the entry-level cost of space exploration by an order of magnitude
- Piggyback launch options to near Earth escape:
 - Lunar transfer/orbit, Sun-Earth L1/L2 transfer, outer planet
- 12U CubeSat with enabling miniaturised technologies:
 - high specific impulse electric propulsion system & cold gas RCS
 - deep space transponder & HGA
 - “high power” deployable steerable solar array
 - highly integrated rad-hardened avionics
- Potential missions:
 - NEO rendezvous for physical characterisation (science, resources)
 - Sun-Earth L5 for space weather (storm advance warning)
- Technology Reference Study performed in ESA Concurrent Design Facility to assess feasibility, tech developments, cost/schedule

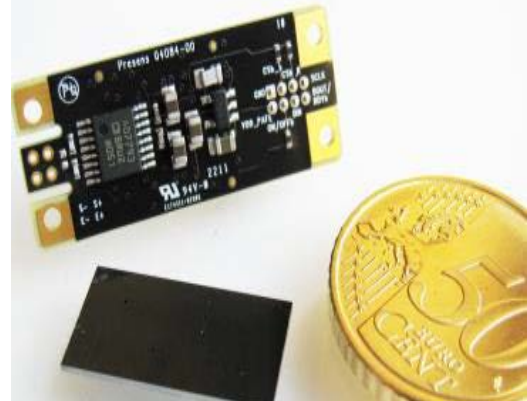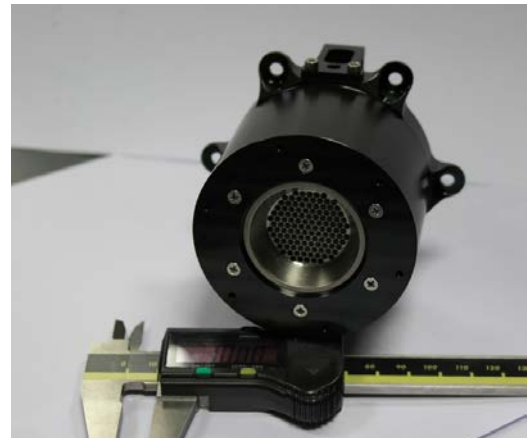

Miniaturised – Asteroid Remote Geophysical Observer (M-ARGO) Mission Concept

- Mission objectives:
 - rendezvous with an asteroid
 - characterise the physical properties of asteroid (shape, surface, mass)
 - assess potential for resource exploitation (composition, hydration)
- Mission phases:
 - piggyback launch on Sun-Earth L2 transfer (astronomy mission)
 - parking in Sun-Earth L2 halo orbit
 - interplanetary transfer using low-thrust solar electric propulsion
 - close proximity operations for 6 months of remote sensing
- Ground segment:
 - 15/35 m ESA ESTRACK stations + Sardinia Radio Telescope (64 m)
 - Mission Operations Centre with flight dynamics, Science Ops Centre
- Programmatics:
 - Budget (1st mission incl. NRE): <25 MEuro ROM
 - Schedule: launch 2021

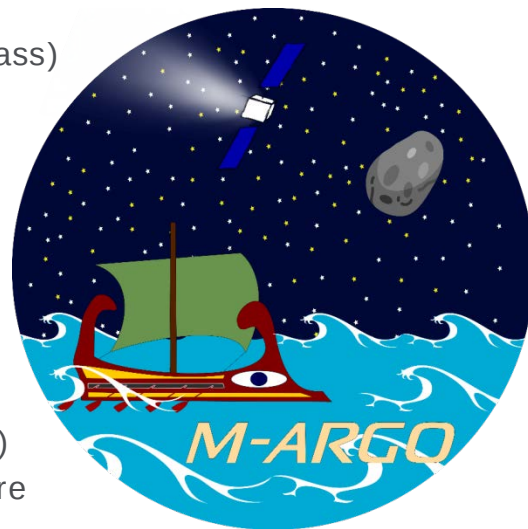


M-ARGO System Overview




Attribute	Specification	
S/C volume	12U form factor (226x226x340 mm)	
Payload volume	1U available	
Propulsion	- μRIT Gridded Ion Engine, gimbal, PPU, neutraliser 2 Xenon propellant tanks & feed system (Max. 2.8 kg)	
Communications	- X-band DS transponder with ranging/doppler (2 Rx, 3 Tx channels) 4x patch antennas for omni-directional TT&C - Deployable HGA reflect-array for P/L data	
Power	- Single body mounted panel (6U face) + Li-ion battery 2-wing deployable solar array with SADM	
Power to EP @ 1 AU	93 W (6 panels)	120 W (8 panels)
Thrust @ 1 AU	1.7 mN	2.4 mN
Isp @ 1 AU	3050 s	3180 s
S/C wet mass (w/ margins)	21.6 kg	22.3 kg
AOCS	- Sensors: visnav camera, star tracker, 6 sun sensors, IMU - Actuators: 3 reaction wheels, 8 Xe cold gas RCS thrusters	
Data handling	Modular avionics with payload data processing	
Thermal control	Passive with radiators & heaters	

M-ARGO Spacecraft Configuration

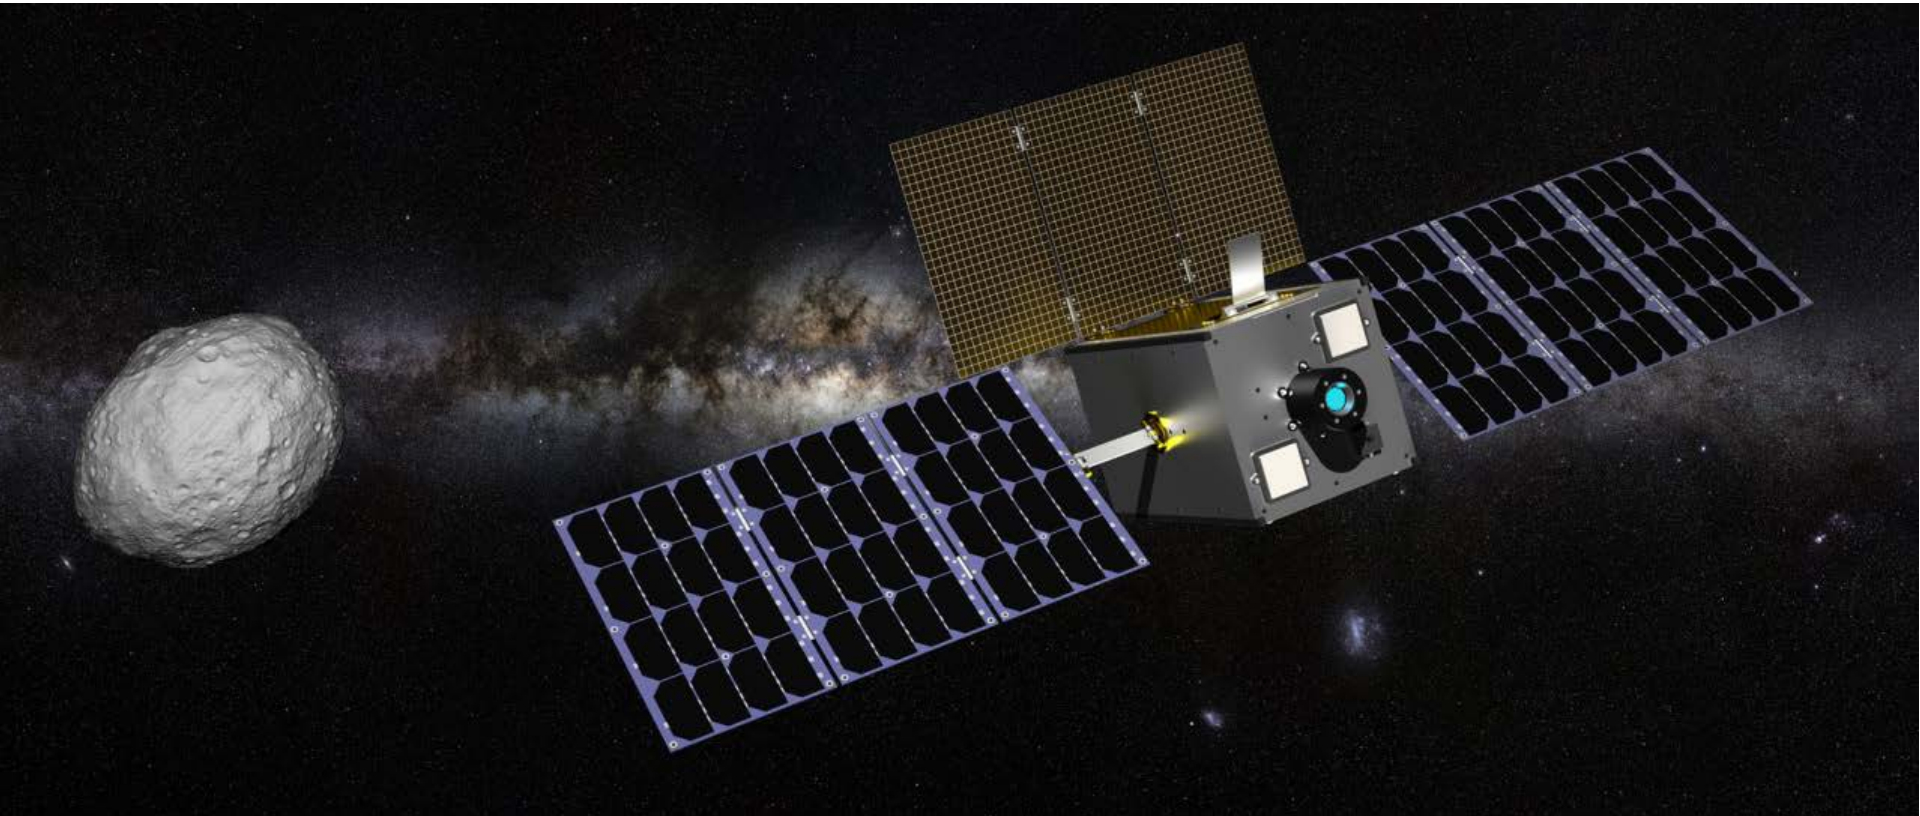

Multi-Spectral Imager

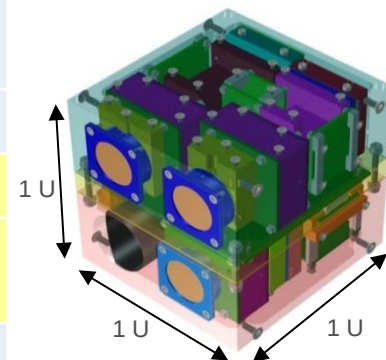

Mass: 950g

Power: 7 W

TRL 6, Aalto-1
heritage (space
qualified)

ESA | 01/01/2016 | Slide 7


ASPECT Multi-spectral imager (VTT, Finland)	VIS channel 500 – 900 nm	NIR channel 900 – 1600 nm	SWIR channel 1600 – 2500 nm
Field of View [deg]	6° x 6°	5.3° x 5.3°	5° circular
Spectral res. [nm]	< 20 nm	< 50 nm	< 25 nm
Spectral bands (tunable in flight)	~ 14	~ 24	~ 30
Image size [pixels]	614 x 614	256 x 256	1 pixel
Pixel size (um)	5.5	30	1000
Focal length (mm)	32.3	81.5	11.7
F/#	3.3	5.04	0.9
GSD at 500 m	9 cm	18 cm	44 m
SNR at phase angle <20°	>40 ($t_{\text{int}} = 50$ ms) at 500-800nm	>40 ($t_{\text{int}} = 15$ ms) at 900-1500nm	>100 ($t_{\text{int}} = 10$ ms) at 1600-2500nm

LASER Altimeter

- DLEM 20 (Jenoptik, Germany)
- Up to 5 Km measurement range
- Measurement accuracy 0.5-1 mm
- Mass < 33g
- Dimensions: 50 mm x 22 mm x 34 mm
- Power on < 1.8 W
- Operational T: -40 °C to + 80 °C
- COTS (not space qualified)





100 ms measuring time
Up to 1500 m measuring distance
(Acc. ± 0.5 m up to 1000 m)

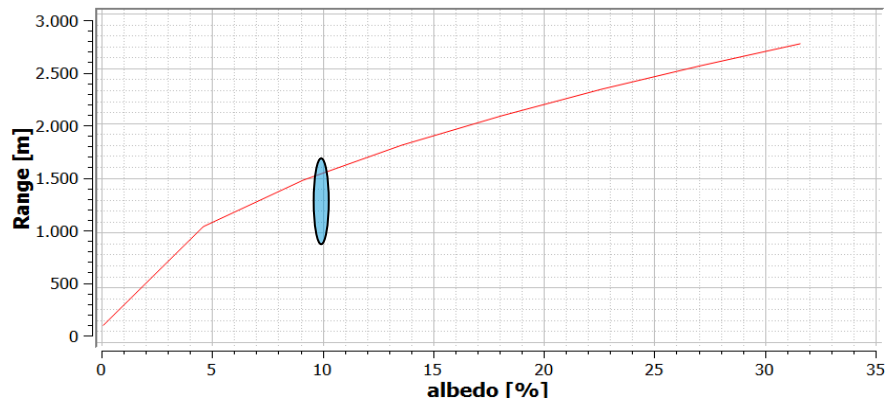

NEO Target Screening

MPCORB database (23/1/2017)
725,896 objects

Pre-filtering
(3-impulse chemical)

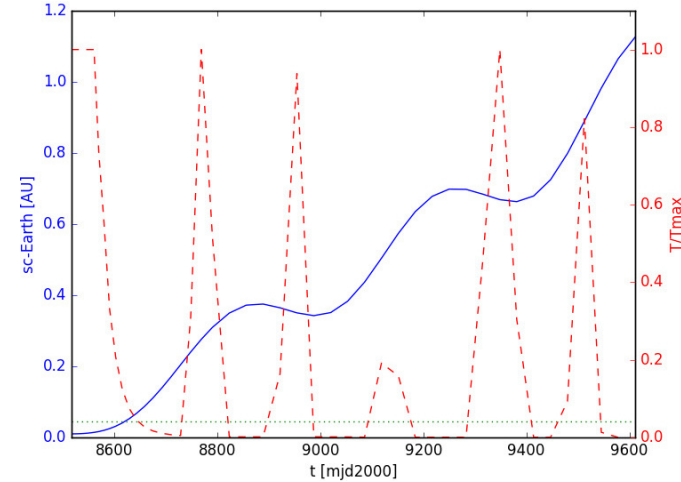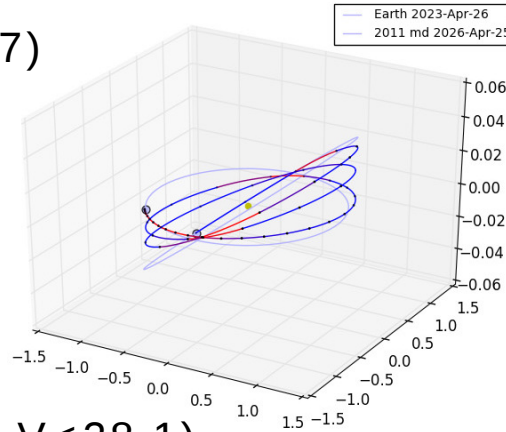

Assumptions

Starting from Earth-Sun L2 with no initial C3

Spacecraft initial mass 20 kg

Maximum thrust of 1.7 mN, specific impulse of 3000 s

Launch window: between 2020 and 2023 (included)

Maximum time of flight: 3 years




Maximum propellant mass: 2.5 kg

63 objects (<2.6 km/s, $n>80$, $V<28.1$)

Low-thrust trajectory
optimisation tool

30 objects (mp <2.5 kg)

Sun Beam to Ion Beam Optimisation

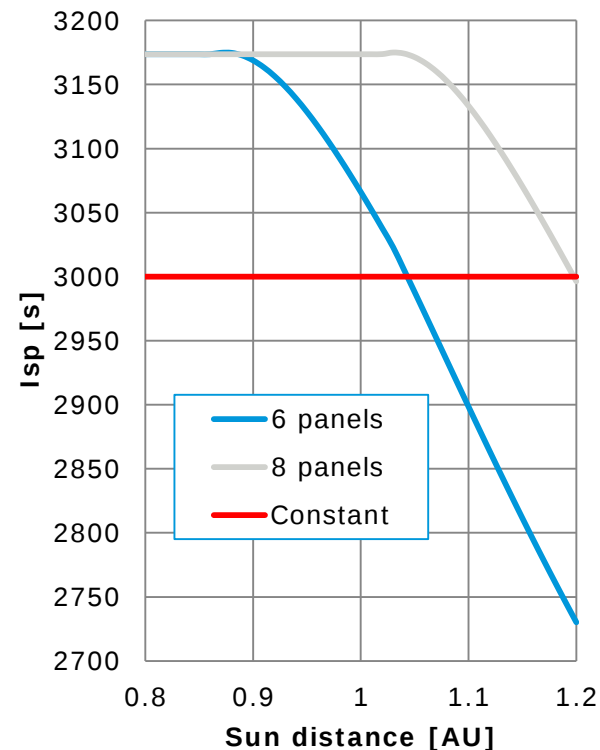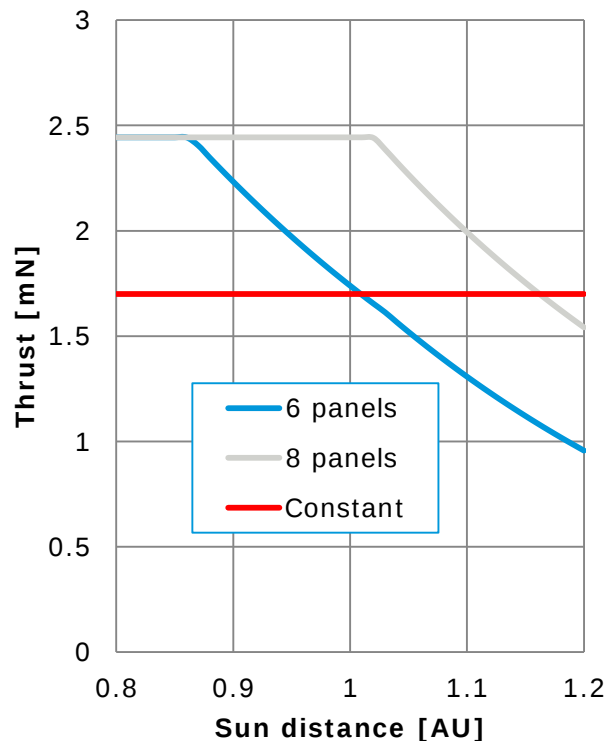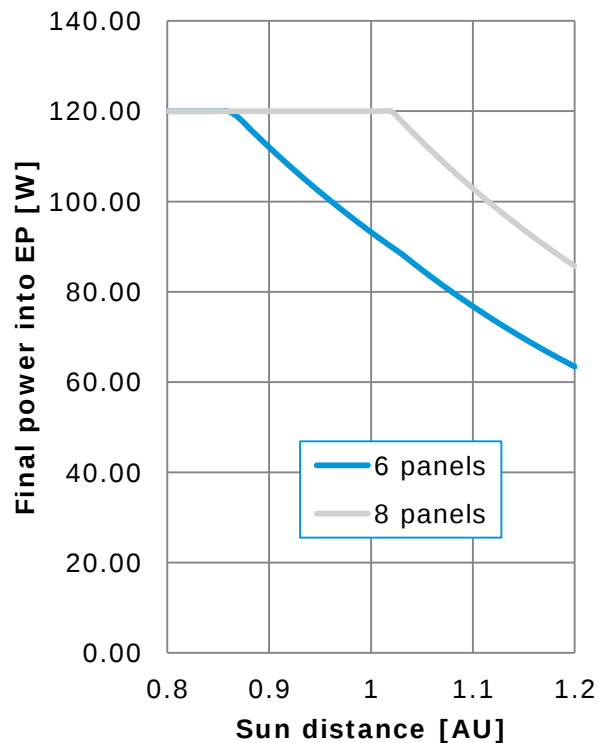

Mission Analysis of Potential Targets

Designation	a [AU]	r_a [AU]	r_p [AU]	e	i [°]	H	ΔV [km / s]	m_p [kg]
2012 UV136	1.008	1.148	0.868	0.14	2.21	25.5	3.17	2.2
2014 EK24	1.006	1.077	0.935	0.07	4.81	23.3	3.92	2.50
1996 XB27	1.189	1.258	1.120	0.06	2.47	21.7	3.62	2.32
YORP	1.006	1.238	0.775	0.23	1.60	22.7	6.74	4.10
2013 BS45	0.992	1.075	0.909	0.08	0.77	25.9	1.88	1.31
2016 FU12	1.003	1.170	0.836	0.17	2.06	26.9	2.7	1.88
2011 MD	1.056	1.095	1.017	0.04	2.45	28.0	3.19	2.17



YORP: orbital elements seem promising but from 2020 on, YORP is getting away from the Earth.





2014 EK24: all orbital elements are in the good ranges but inclination is too high

1996 XB27: at rendezvous the range to Earth is too large for communication

Mission Analysis



- Variable thrust & Isp vs sun distance
- 8 panels option
- Delta-v: 3.17 km/s
- Xe mass: 2.2 kg
- Thrust-on: 395 d
- Sun distance <1.2 AU
- Earth range: <0.8 AU
- SAA during thrust-on phases 75-175 deg

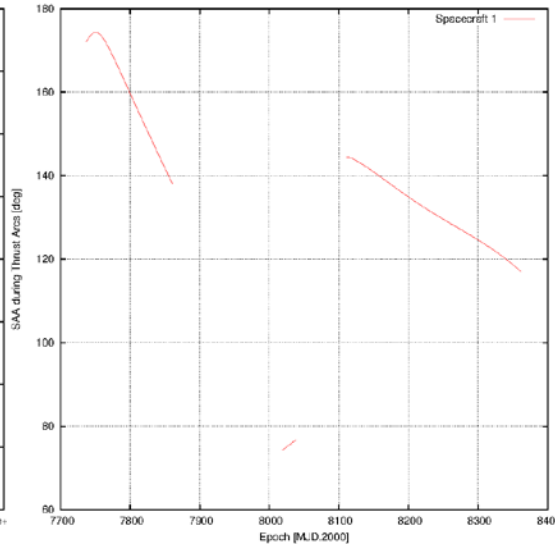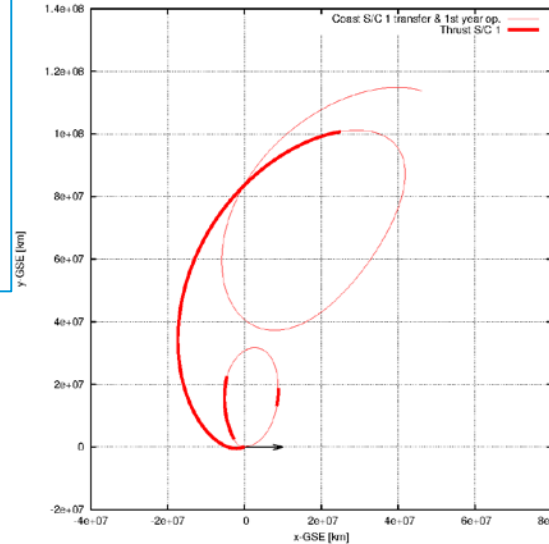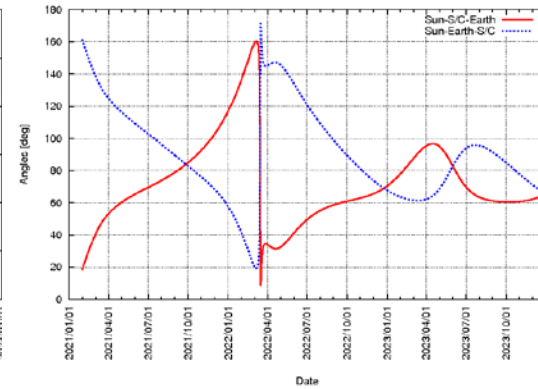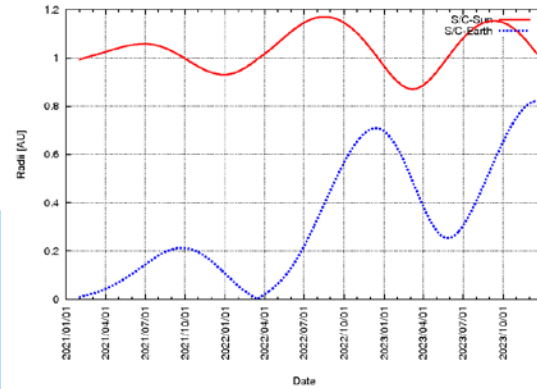


2012
UV136

**All asteroids visited
so far are >300 m in size**


**All 4 accessible targets
are <50 m**

**For this size, models
predict a compact
monolithic body which has
no regolith and is fast
spinning**


New science!

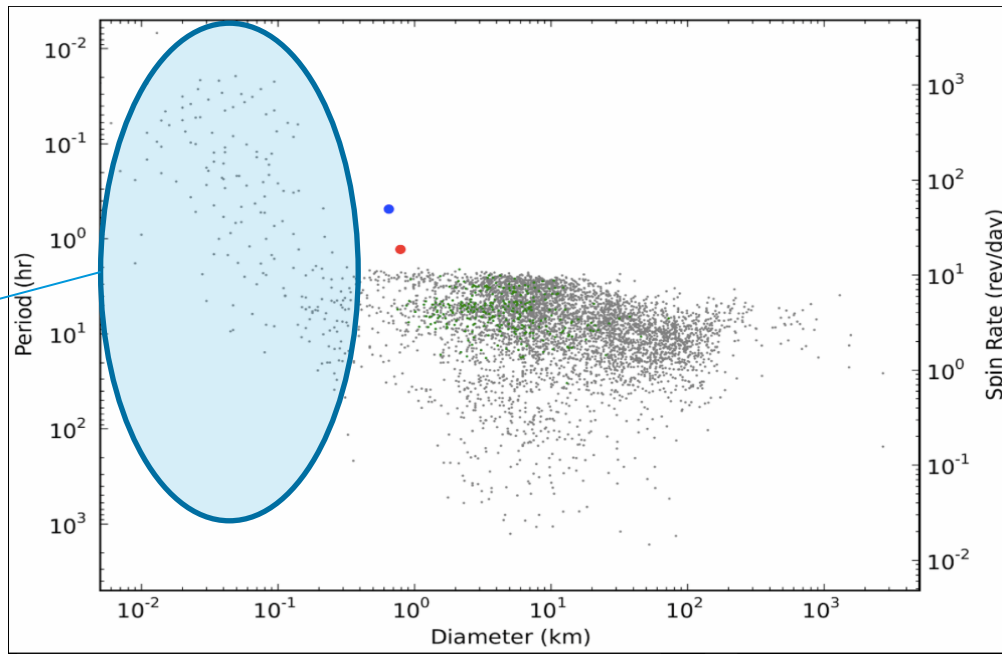




Close Proximity Operations

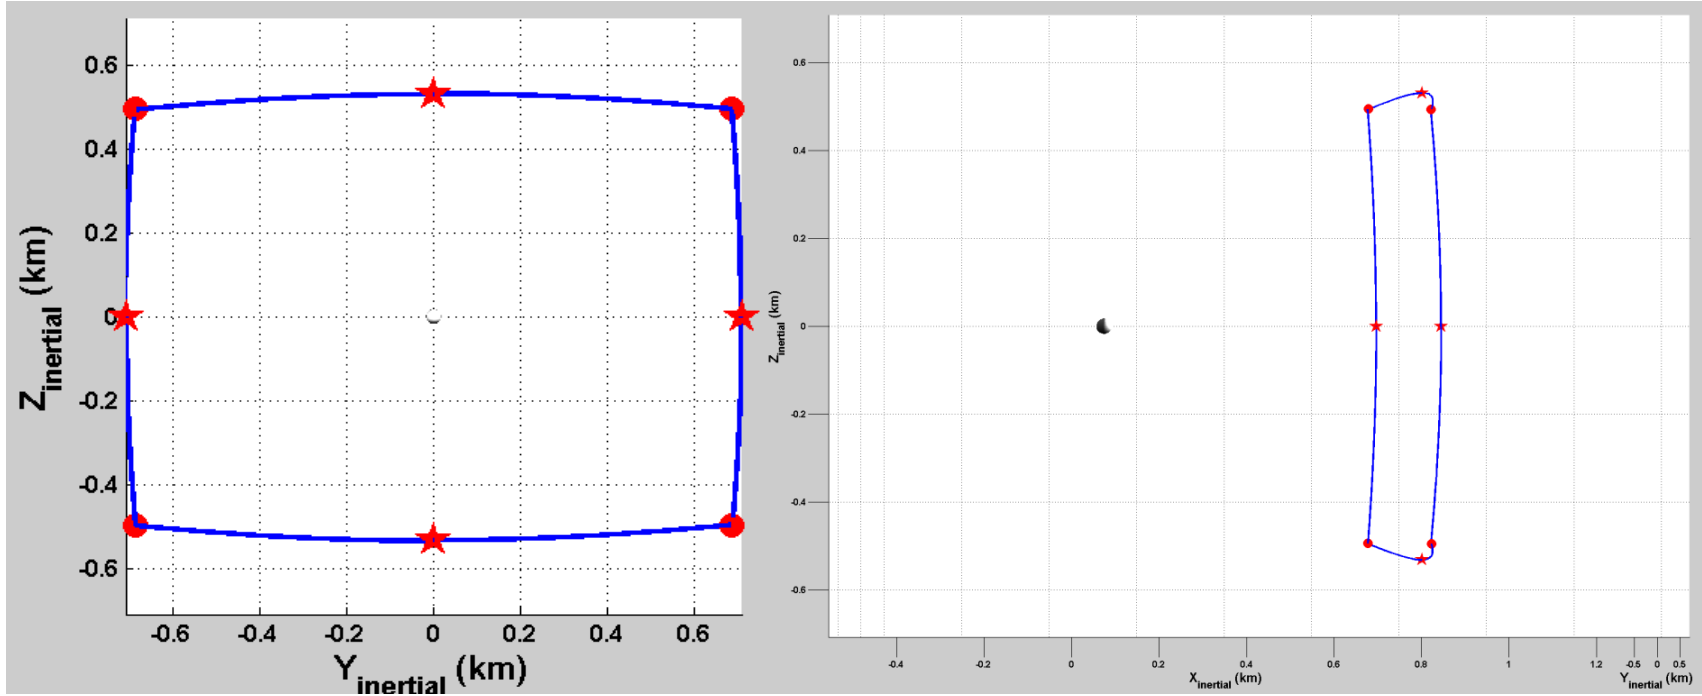


Target 2012 UV136, 7 day repeat cycle

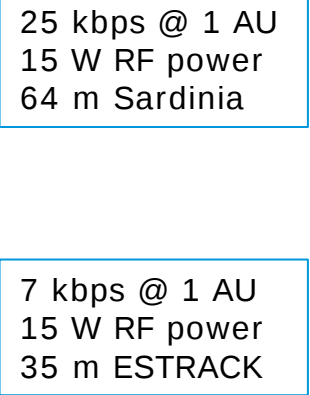

Science Data Return

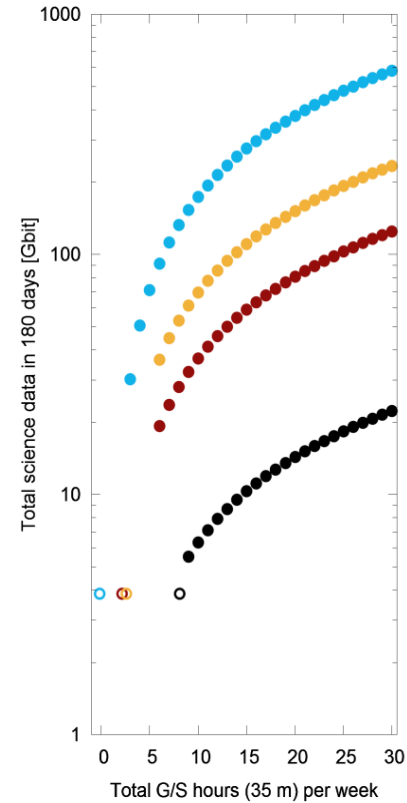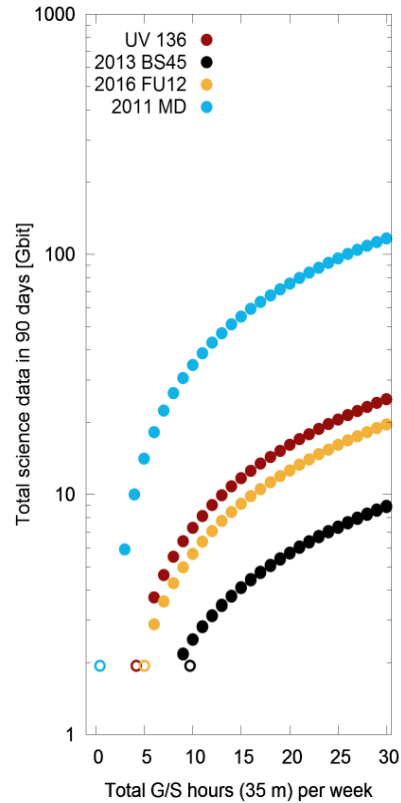
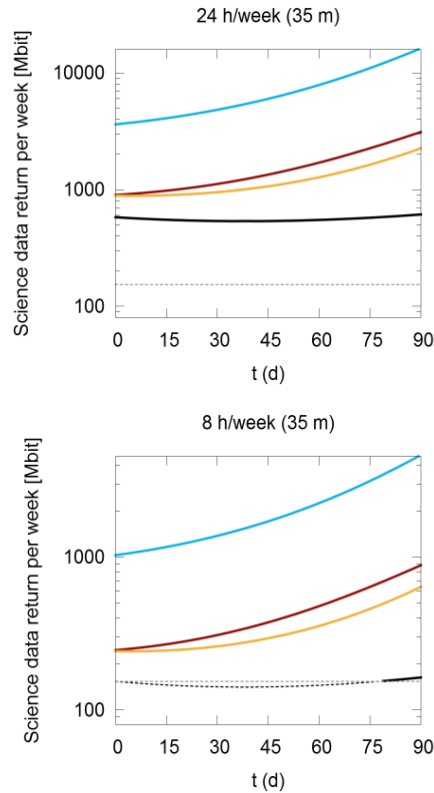


Alternative L5 Space Weather Mission

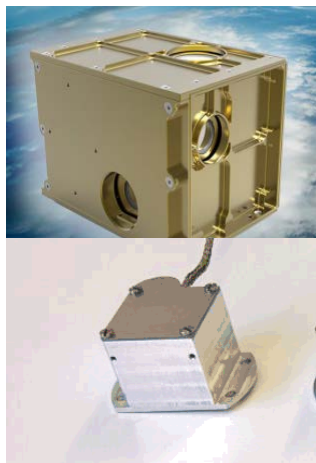

Radiation monitor

Magnetometer
+ 1 m boom

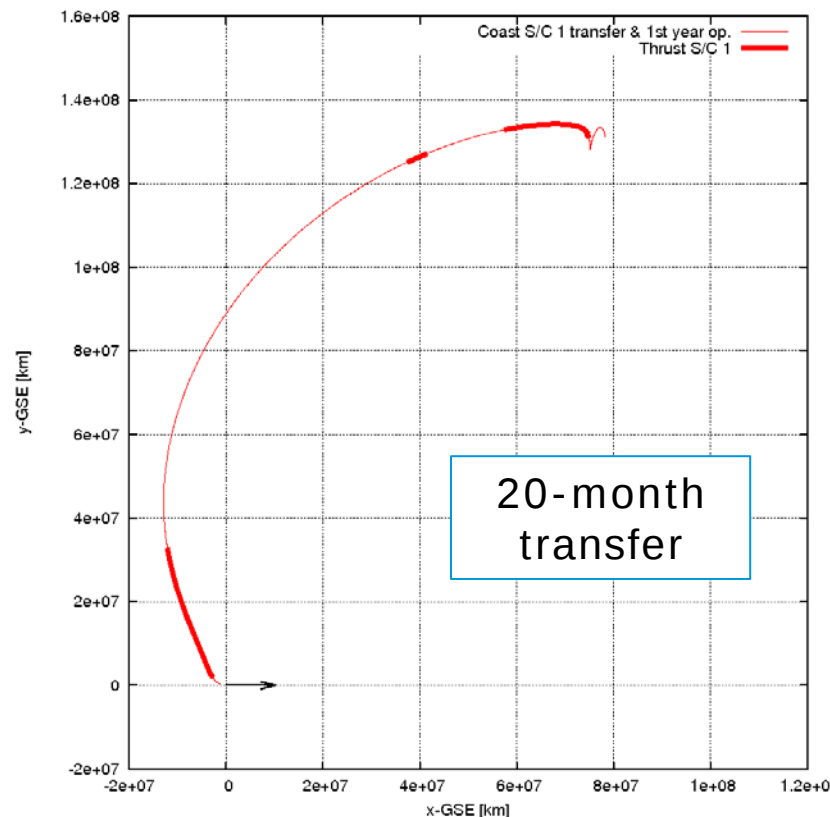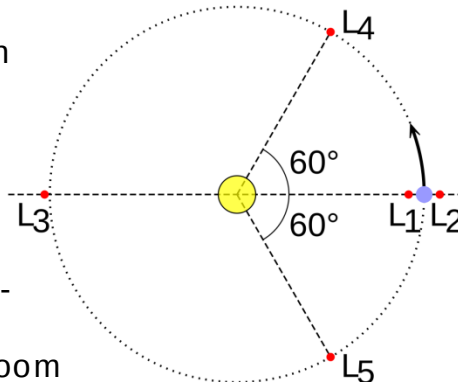

Departure date (from SEL2)	2024/2/6
Earth encounter	N/A
Asteroid arrival date	2025/9/22
Delta-V	2.62 km/s
Propellant mass (without margin)	1.70 kg
Thrust-on time	342 days
Range of distance from Sun	0.99-1.15 AU
Range of distance from Earth	0-1.02 AU
Range of SAA value during thrust-on	80-135 deg

Conclusions



- Stand-alone Deep Space CubeSats are technically feasible in the near-term
- Delta-V capability (3.75 km/s) encompasses at least 4 NEO targets for rendezvous (up to 30 as of today), and transfer to Sun-Earth L5 for space weather mission
- Technologies are either high TRL for CubeSat COTS products or TRL 3/4 to be developed to TRL 6 within the frame of the ESA Technology Programme (SADM, EPROP subsystem, X-band transponder & HGA)
- Radiation hardness assurance of COTS electronics components wrt destructive latch-ups needed in the project, and some delta-qualification of equipment
- Schedule to flight readiness in early 2021, launch July 2021 assuming technology developments start soon
- ROM cost is considered to be marginally feasible within 25 MEuro budget
- Major cost driver is the Flight Dynamics support cost (50% of the overall ROM cost estimate) -> lower cost approaches to be investigated
- Next steps: kick-off tech dev activities & identify piggyback launch, then start Phase A/B

Acknowledgements to ESA CDF Study Team



CUSTOMER	I. Carnelli (General Studies Programme)		
TEAM LEADER	R. Walker		
AOCS	M. Casasco J. Gil Fernandez T. Muresan	PROGRAMMATICS/ AIV	D. Hagelschuer Y. Le Deuff
COMMUNICATIONS	P. Concari	ELECTRIC PROPULSION	D. Feili N. Wallace F. Marguet
CONFIGURATION	S. Mangunsong	RISK	D. Wegner
COST	G. Cifani L. Visconti	MISSION ANALYSIS	M. Khan M. Scobeau
DATA HANDLING	T. Szewczyk	SPACE ENVIRONMENT	M. Millinger M. Grulich
GS&OPS	D. Taubert	STRUCTURES	U. Block
MECHANISMS	M. Yorck D. Bojiloff	SYSTEMS	D. Binns M. Scherrmann V. Pesquita
PAYLOAD/ DETECTORS	P. Corradi O. Sqalli	THERMAL	P. Hager V. Laneve T. Flecht
POWER	P. Fernandez	TARGET SCREENING	D. Izzo A. Merata

THANK YOU

Roger Walker
ESA/ESTEC
Keplerlaan 1
2201 AZ Noordwijk
The Netherlands
Tel: +31 71 565 3349
e-mail: roger.walker@esa.int